

JH-8 series

JH-M8-MDF11


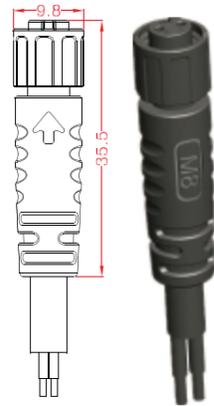


Figure No.(图号)
 JH-M8-MDF11-2P-X
 JH-M8-MDF11-3P-X
 JH-M8-MDF11-4P-X

Simple parameter description:
 Pins number: 2/3/4
 Rated voltage: 60V DC/AC
 Rated current: 3A
 Insulation voltage: DC 1KV 2mA 60s
 Insulation resistance: DC 500V 200MΩ
 IP-Code: IP67
 Operating temperature: -40 ~ 105°C
 Molding cable diameter: 2~6mm

PIN layout(插针排列方式):

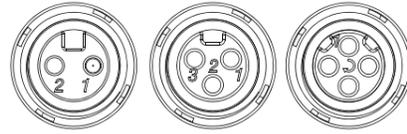

简要参数描述:
 插针数: 2/3/4
 额定电压: 60V DC/AC
 额定电流: 3A
 绝缘电压: DC 1KV 2mA 60s
 绝缘电阻: DC 500V 200MΩ
 IP防护等级: IP67
 工作温度: -40 ~ 105°C
 注塑电缆直径: 2~6mm

JH-M8-FDM11

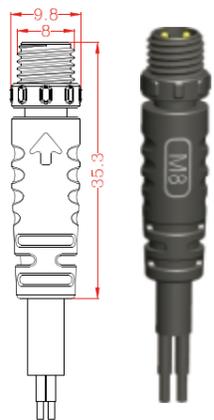


Figure No.(图号)
 JH-M8-FDM11-2P-X
 JH-M8-FDM11-3P-X
 JH-M8-FDM11-4P-X

Simple parameter description:
 Pins number: 2/3/4
 Rated voltage: 60V DC/AC
 Rated current: 3A
 Insulation voltage: DC 1KV 2mA 60s
 Insulation resistance: DC 500V 200MΩ
 IP-Code: IP67
 Operating temperature: -40 ~ 105°C
 Molding cable diameter: 2~6mm

PIN layout(插针排列方式):



简要参数描述:
 插针数: 2/3/4
 额定电压: 60V DC/AC
 额定电流: 3A
 绝缘电压: DC 1KV 2mA 60s
 绝缘电阻: DC 500V 200MΩ
 IP防护等级: IP67
 工作温度: -40 ~ 105°C
 注塑电缆直径: 2~6mm

JH-10 series

JH-M10-MDF11

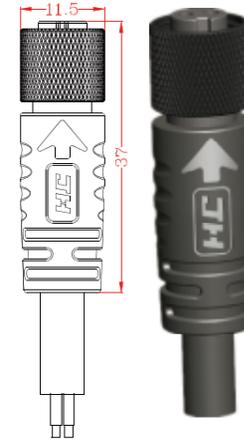


Figure No.(图号)
 JH-M10-MDF11-2P-X
 JH-M10-MDF11-3P-X
 JH-M10-MDF11-4P-X
 JH-M10-MDF11-2+3P-X

Simple parameter description:
 Pins number: 2/3/4/2+3
 Rated voltage: 60V DC/AC
 Rated current: 8A (8A+3A)
 Insulation voltage: DC 1KV 2mA 60s
 Insulation resistance: DC 500V 200MΩ
 IP-Code: IP67
 Operating temperature: -40 ~ 105°C
 Molding cable diameter: 2-6mm

PIN layout(插针排列方式):



简要参数描述:
 插针数: 2/3/4/2+3
 额定电压: 60V DC/AC
 额定电流: 8A (8A+3A)
 绝缘电压: DC 1KV 2mA 60s
 绝缘电阻: DC 500V 200MΩ
 IP防护等级: IP67
 工作温度: -40 ~ 105°C
 注塑电缆直径: 2~6mm

JH-M10-FDM11


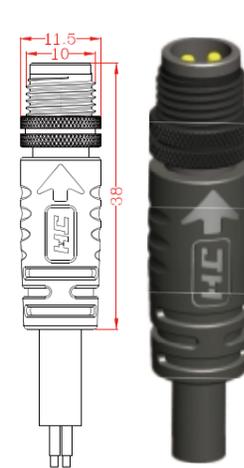


Figure No.(图号)
 JH-M8-FDM11-2P-X
 JH-M8-FDM11-3P-X
 JH-M8-FDM11-4P-X
 JH-M8-FDM11-2+3P-X

Simple parameter description:
 Pins number: 2/3/4/2+3
 Rated voltage: 60V DC/AC
 Rated current: 8A (8A+3A)
 Insulation voltage: DC 1KV 2mA 60s
 Insulation resistance: DC 500V 200MΩ
 IP-Code: IP67
 Operating temperature: -40 ~ 105°C
 Molding cable diameter: 2-6mm

PIN layout(插针排列方式):



简要参数描述:
 插针数: 2/3/4/2+3
 额定电压: 60V DC/AC
 额定电流: 8A (8A+3A)
 绝缘电压: DC 1KV 2mA 60s
 绝缘电阻: DC 500V 200MΩ
 IP防护等级: IP67
 工作温度: -40 ~ 105°C
 注塑电缆直径: 2~6mm